


AA & A MACHINERY MOVING

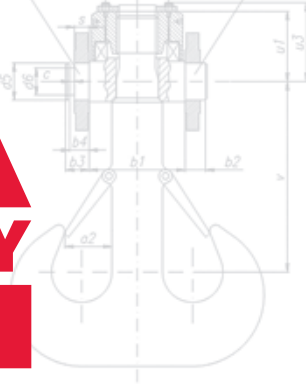

Versa-Lift 25/35

Drive: Hydrostatic: 2-Speed

Fuel: LP/Gas

Tires: Front 28 x 16 Poly

Rear 22 x 8 Poly

Grade: Empty 38%

Loaded 17%

Tilt: Forward 11°

Back 6°

Weight: Gross: 36,500 lbs.

Unit: 26,000 lbs.

Counterweight: 6,000 lbs.

Boom: 3,000 lbs.

Forks: 1,500 lbs.

Boom: Height: 22' (to center of pin)

Reach: 8' (to center of pin)

Load Capacity: 35,000 lbs. @ 24" Extended


25,000 lbs. @ 24" Retracted

Width: 58"

Wheelbase: 112" Extended

76" Retracted

Forks: 3" x 8" x 108"

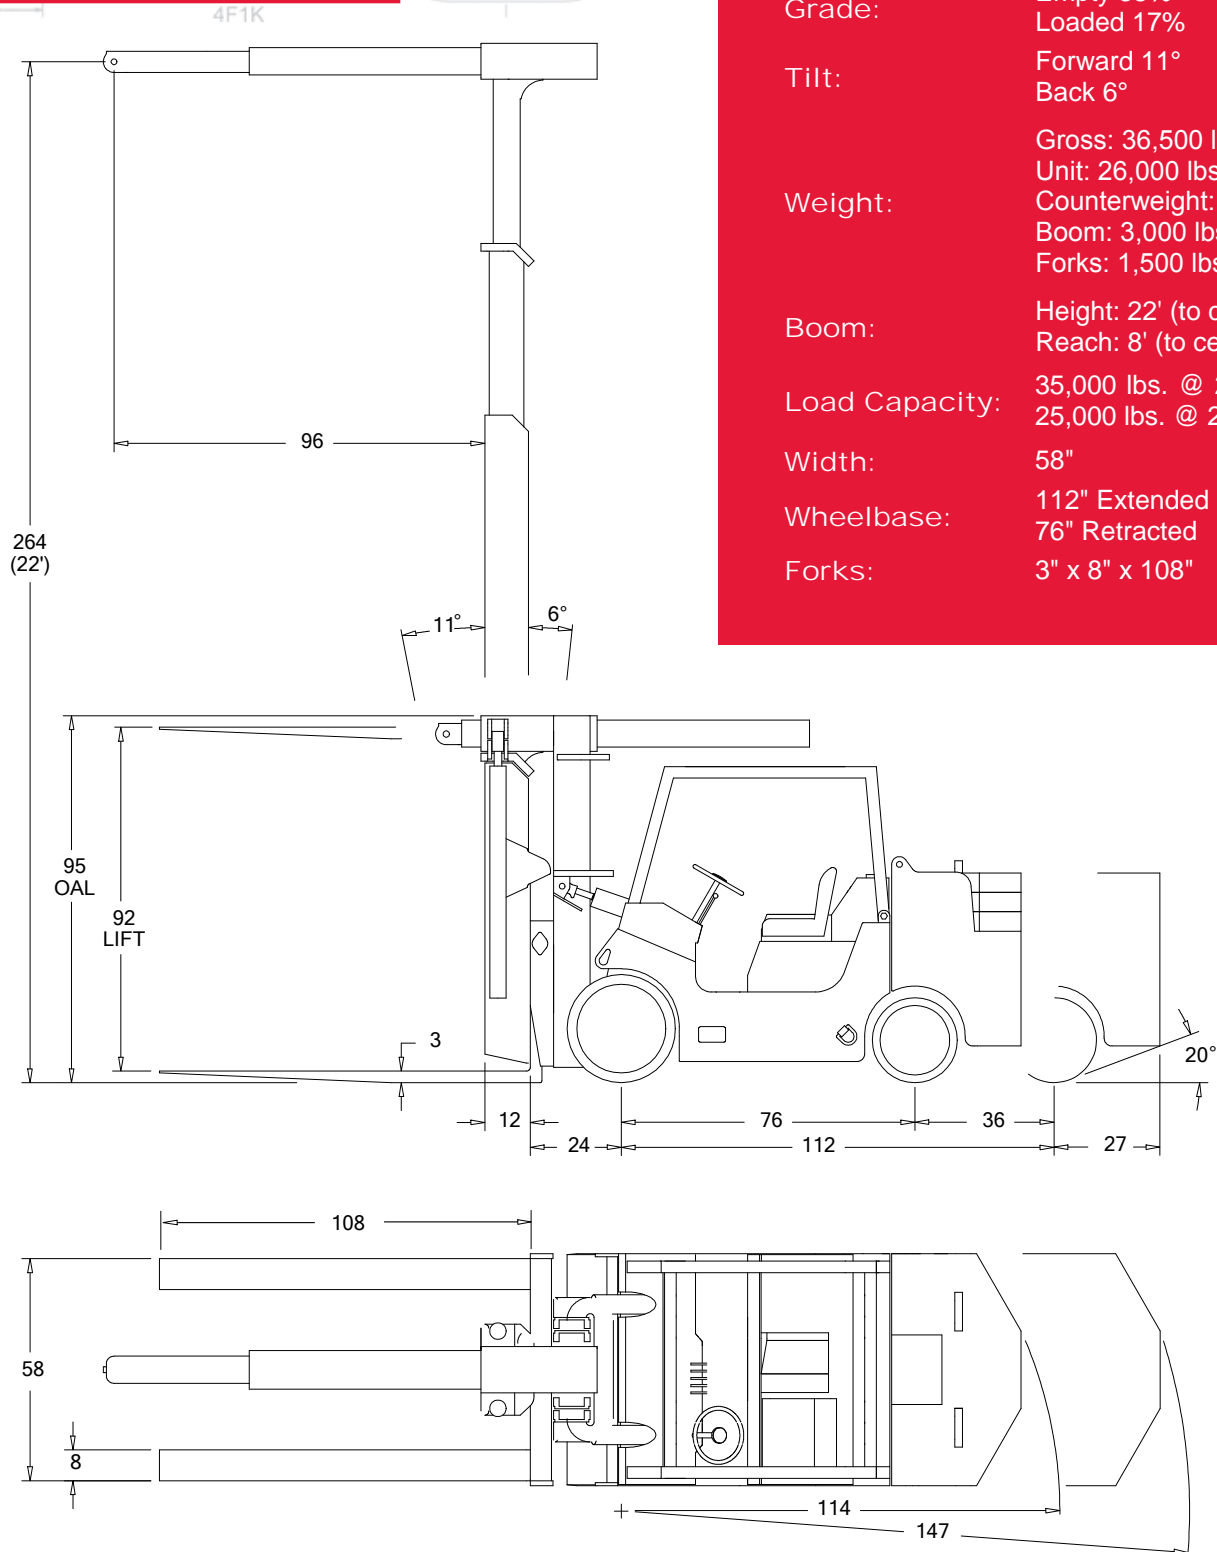

Rent a Versa-Lift 25/35 for Your Next Project
215-428-1100 | AAmachinery.com/Versa-Lift-Rentals

AA & A MACHINERY MOVING

Versa-Lift 25/35

Slab Weight (lbs.)
1,900

Number of Slabs
3

Standard Wheel Base (in.)
76

		Lifting Capacity w/ Forks Only (lbs.)			
		Counterweight Extension (in.)			
		0	12	24	36
Load Center From Fork Face (in.)	24	24,300	28,200	32,000	35,800
	36	19,400	22,500	25,500	28,600
	48	16,200	18,700	21,300	23,800
	60	13,800	16,000	18,200	20,400
	72	12,100	14,000	15,900	17,800
	84	10,700	12,400	14,100	15,800

		Lifting Capacity w/ Boom Only (lbs.)			
		Counterweight Extension (in.)			
		0	12	24	36
Load Center From Boom Face (in.)	12	23,500	27,400	31,200	35,100
	24	18,800	21,900	24,900	28,000
	36	15,600	18,200	20,700	23,300
	48	13,400	15,600	17,800	19,900
	60	11,700	13,600	15,500	17,400
	72	10,400	12,100	13,800	15,500
	84	9,400	10,900	12,400	13,900
	96	8,500	9,900	11,300	12,700

		Lifting Capacity w/ Forks & Boom (lbs.)			
		Counterweight Extension (in.)			
		0	12	24	36
Load Center From Boom Face (in.)	24	17,800	20,900	24,000	27,000
	36	14,800	17,400	19,900	22,500
	48	12,700	14,900	17,100	19,300
	60	11,100	13,000	14,900	16,800
	72	9,900	11,600	13,300	15,000
	84	8,900	10,400	11,900	13,500
	96	8,100	9,500	10,800	12,200

****All load capacities are rated with the mast vertical.**

Other Versa-Lift Models Available: 40/60 & 60/80
215-428-1100 | AAmachinery.com/Versa-Lift-Rentals